



Kitchener 3 40 (226 3/8" x 299 1/4")

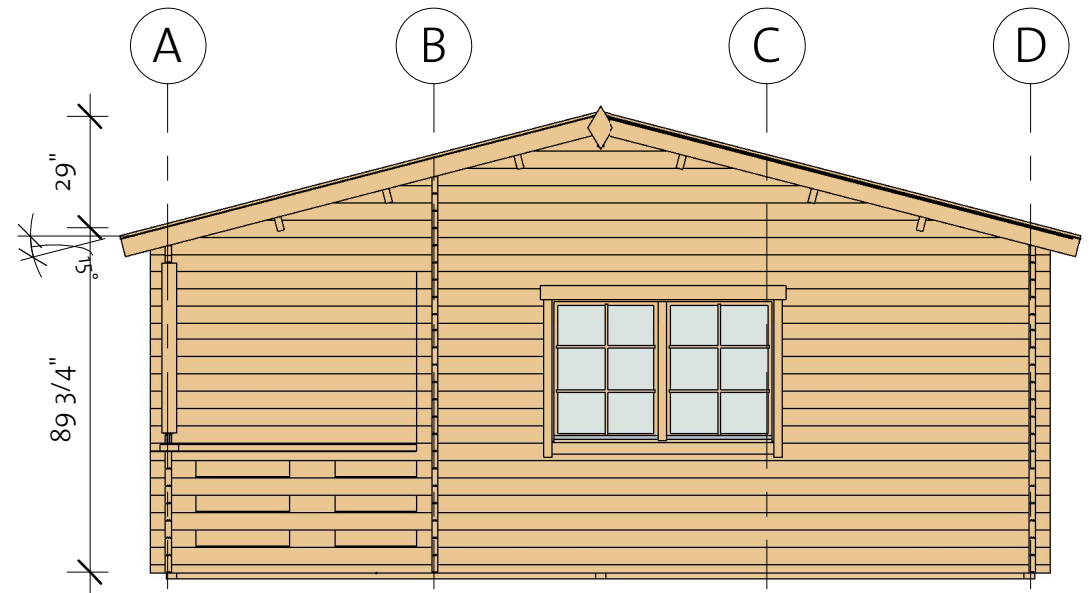

92402292_240308

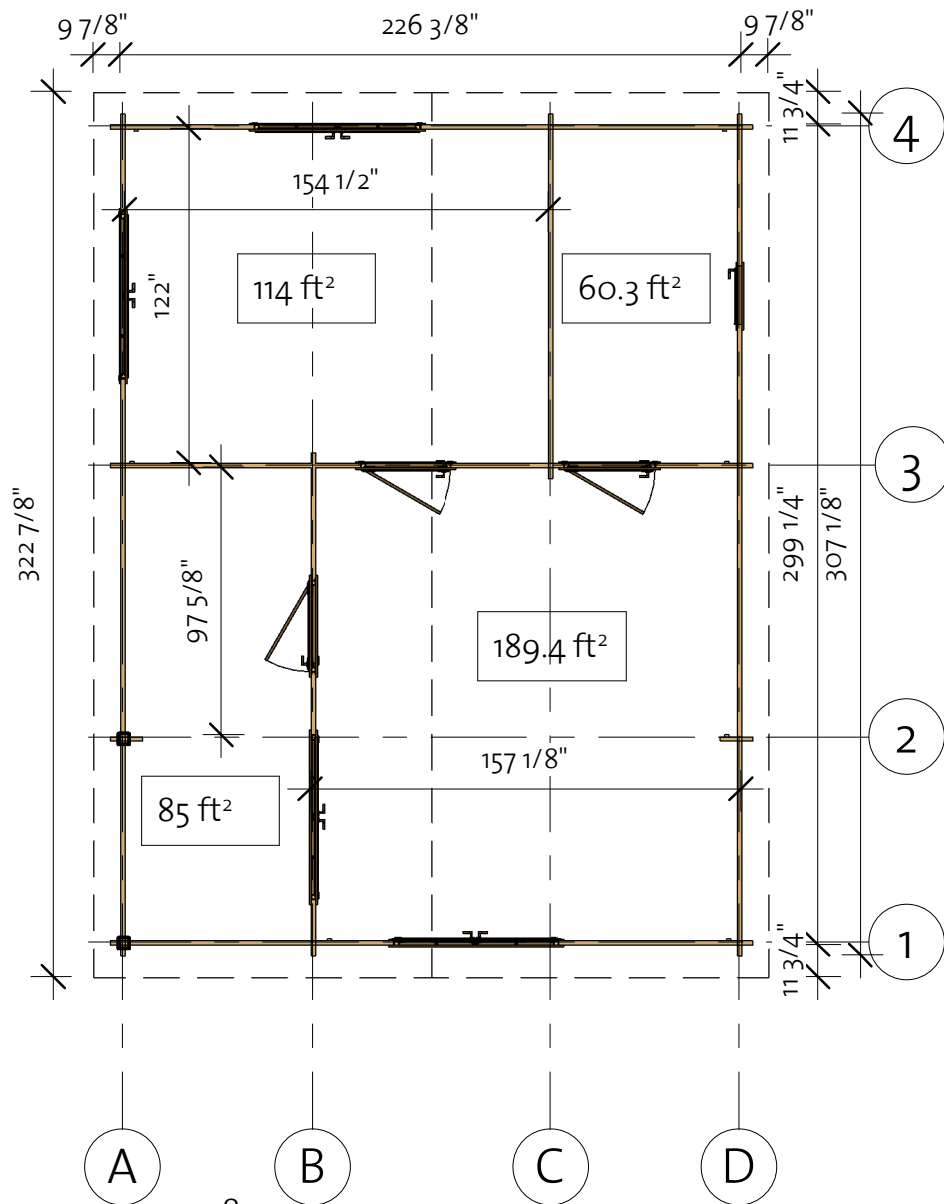


EZ Log Structures
Do-It-Yourself Building Kits



Kitchener 3 40 (226 3/8" x 299 1/4")

Floor Plan



Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB1	FB 17x114		35	172 1/4"
FB2	FB 17x114		50	121 3/4"
TB	TB 21x95		17	172 1/4"


BB 1	BB 18x40		5	126"
BB 2	BB 18x40		5	173 1/4"

1 Baseboard

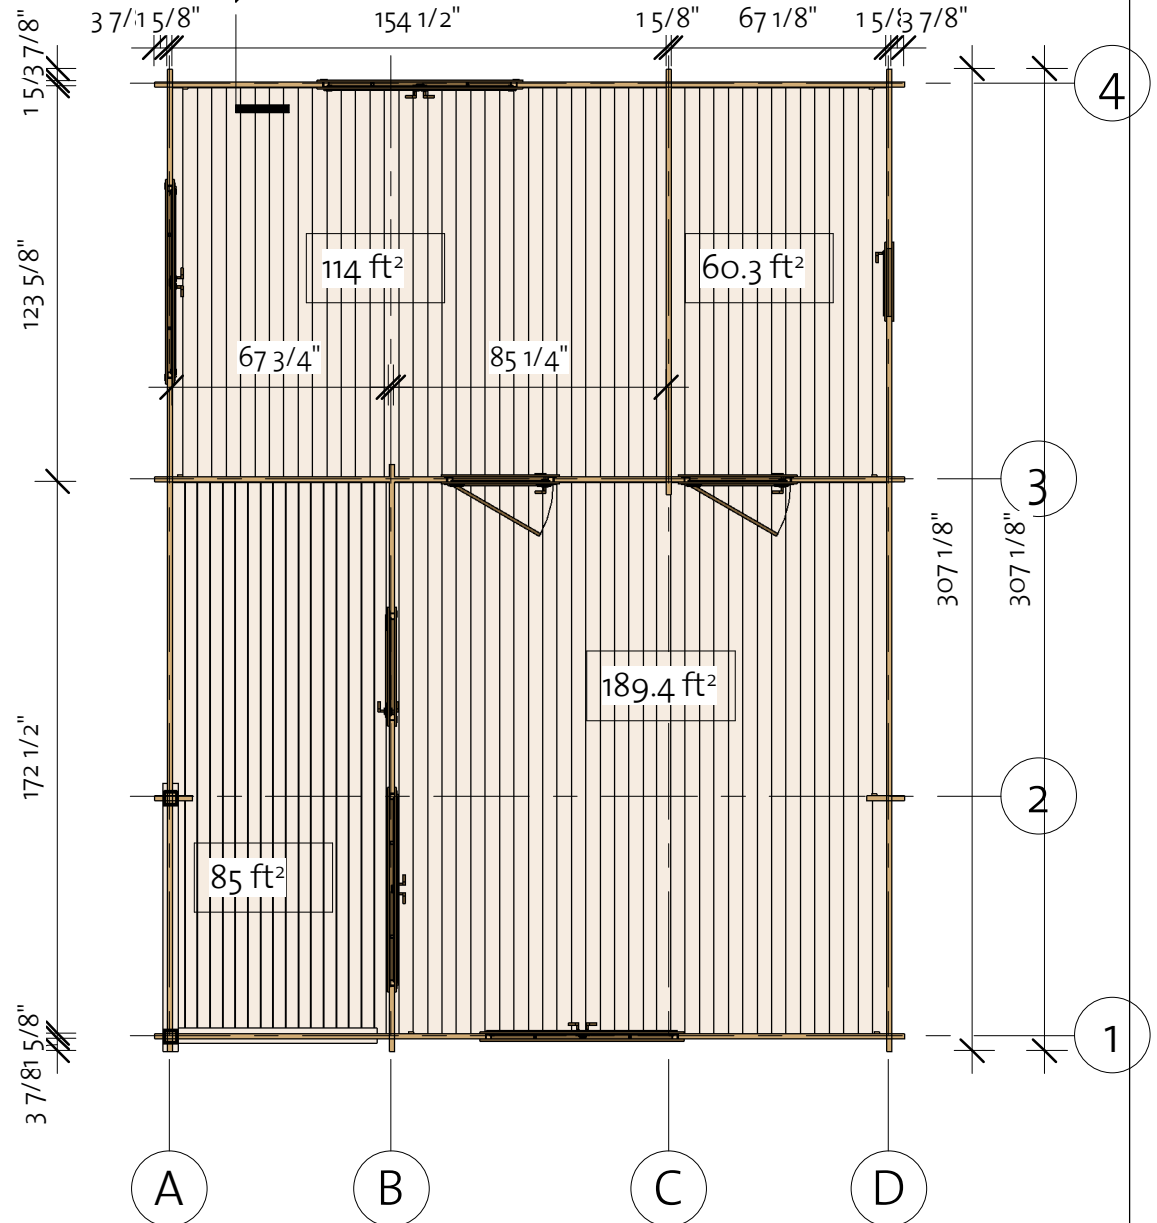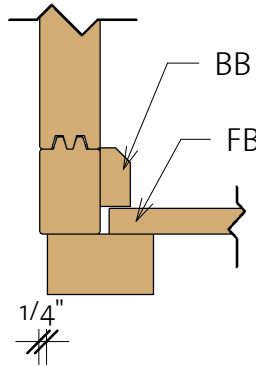



Kitchener 3 40 (226 3/8" x 299 1/4")

Wall 1

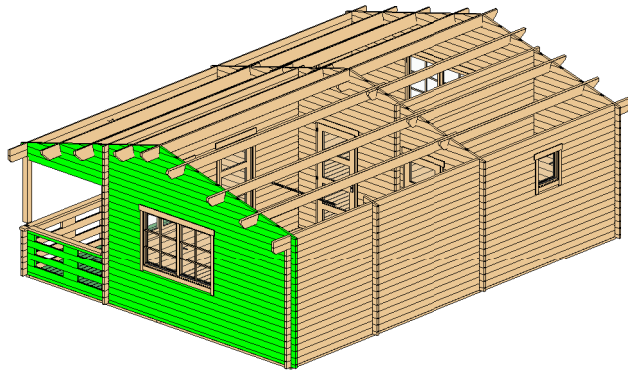


Log Profile Wall 1		Log Profile Wall 1	
Profile	Profile	Profile	Profile

40x57		40x114	
-------	---	--------	---

Wall 1			
Mark	Profile	Count	Cut Length


1BL-1	40x57	1	234 1/4"
1LG-1 *	40x114	1	33"
1LG-2 *	40x114	1	67 1/2"
1LG-3 *	40x114	1	102 1/8"
1LG-4 *	40x114	1	136 3/4"
1LG-5 *	40x114	1	168 3/8"
1LG-6 *	40x114	1	205 7/8"
1LG-7 *	40x114	1	234 1/4"
1LG-8	40x114	1	234 1/4"
1LG-9	40x114	1	234 1/4"
1LG-10	40x114	4	165"
1LG-11	40x114	9	33 7/8"
1LG-12	40x114	9	70 1/2"
1LG-13	40x114	1	234 1/4"
1LG-14	40x114	3	234 1/4"
1LG-15	40x114	3	11 3/4"
1LG-16	40x114	3	11 3/4"

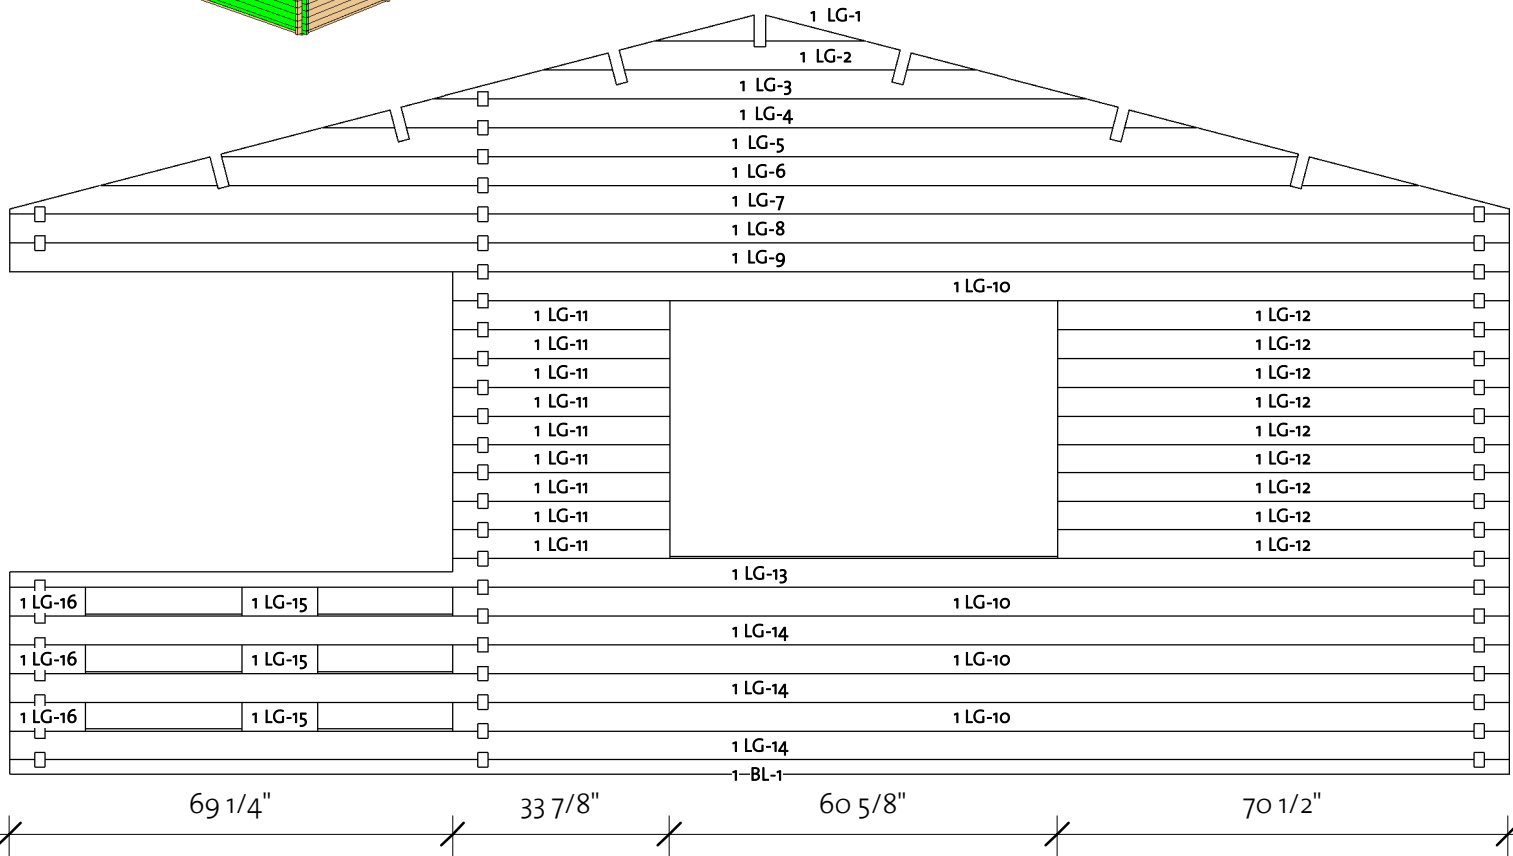

* Gable - delivered premounted

Kitchener 3 40 (226 3/8"x299 1/4")

Wall 2

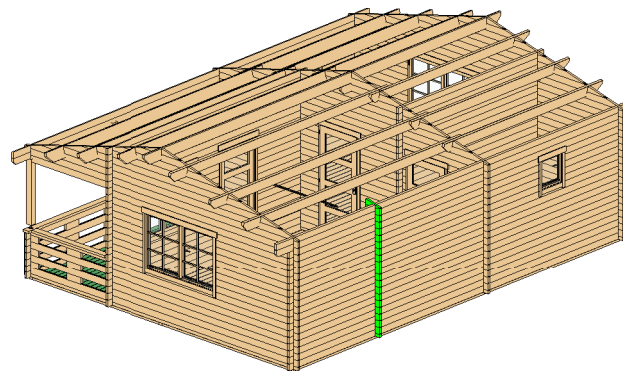

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	2	11 3/4"
2LG-1	40x57	1	11 3/4"
2LG-2	40x114	25	11 3/4"
2LG-3	40x114	1	11 3/4"

	2 LG-1
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 BL-1



2 LG-3	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 BL-1	

Log Profile Wall 2	
Profile	Profile

40x57	
40x57	

Kitchener 3 40 (226 3/8" x 299 1/4")

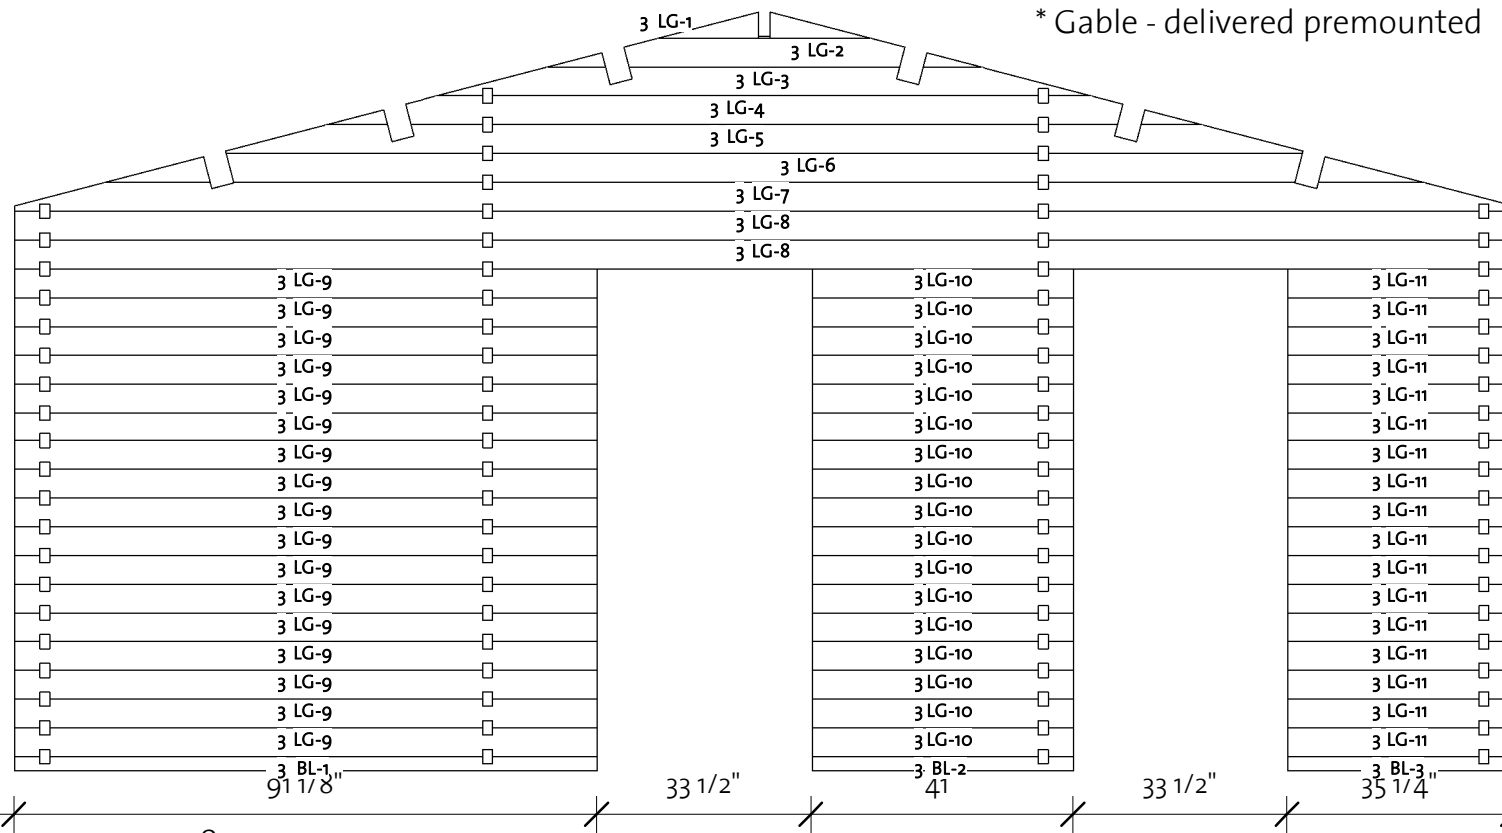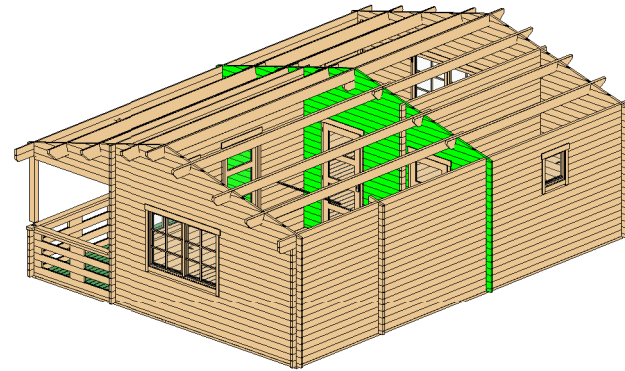

Wall 3



Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	1	91 1/8"
3BL-2	40x57	1	41"
3BL-3	40x57	1	35 1/4"
3LG-1*	40x114	1	33"
3LG-2*	40x114	1	67 1/2"
3LG-3*	40x114	1	102 1/8"
3LG-4*	40x114	1	136 3/4"
3LG-5*	40x114	1	168 3/8"
3LG-6*	40x114	1	205 7/8"
3LG-7*	40x114	1	234 1/4"
3LG-8	40x114	2	234 1/4"
3LG-9	40x114	17	91 1/8"
3LG-10	40x114	17	41"
3LG-11	40x114	17	35 1/4"



Log Profile Wall 3	
Profile	Profile

40x57	
40x57	

92402292_240308

Kitchener 3 40 (226 3/8" x 299 1/4")

Wall 4

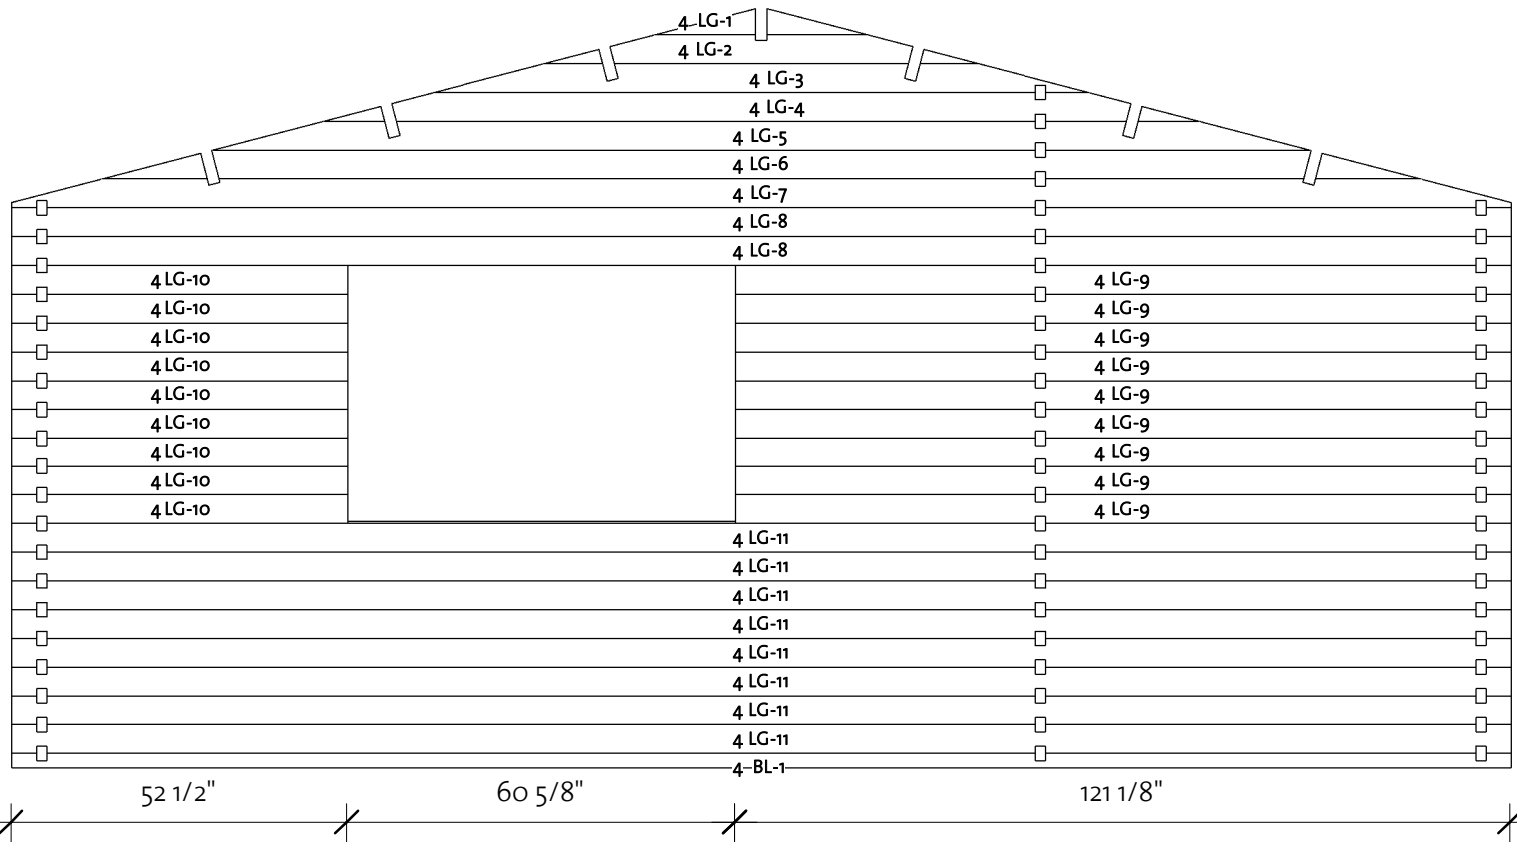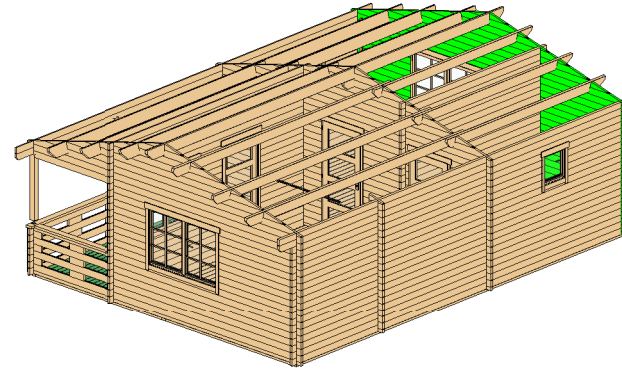



Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	234 1/4"
4LG-1	* 40X114	1	33"
4LG-2	* 40X114	1	67 1/2"
4LG-3	* 40X114	1	102 1/8"
4LG-4	* 40X114	1	136 3/4"
4LG-5	* 40X114	1	171 3/8"
4LG-6	* 40X114	1	205 7/8"
4LG-7	40X114	1	234 1/4"
4LG-8	40X114	2	234 1/4"
4LG-9	40X114	9	121 1/8"
4LG-10	40X114	9	52 1/2"
4LG-11	40X114	8	234 1/4"

* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile




40X57	
40X114	

92402292_240308

Kitchener 3 40 (226 3/8" x 299 1/4")



Wall A

Log Profile Wall A		Log Profile Wall A	
Profile	Profile	Profile	Profile

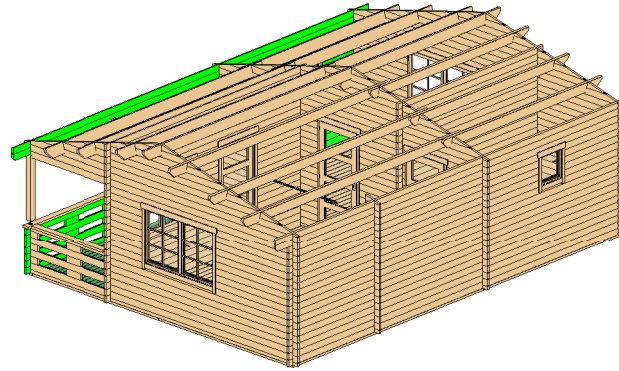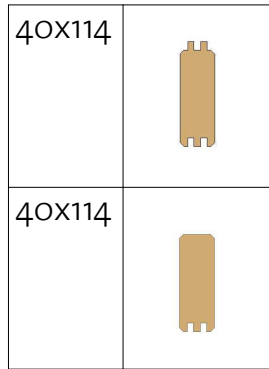


Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	1	136 1/4"
ALG-2	40x114	1	190 1/2"
ALG-3	40x114	1	40 1/8"
ALG-4	40x114	17	36 1/4"
ALG-5	40x114	9	133 1/8"
ALG-6	40x114	6	11 3/4"
ALG-7	40x114	3	11 3/4"
ALG-8	40x114	1	84 1/4"
ALG-9	40x114	3	84 1/4"
ATL-1	40x114	1	136 1/4"
ATL-2	40x114	1	190 1/2"

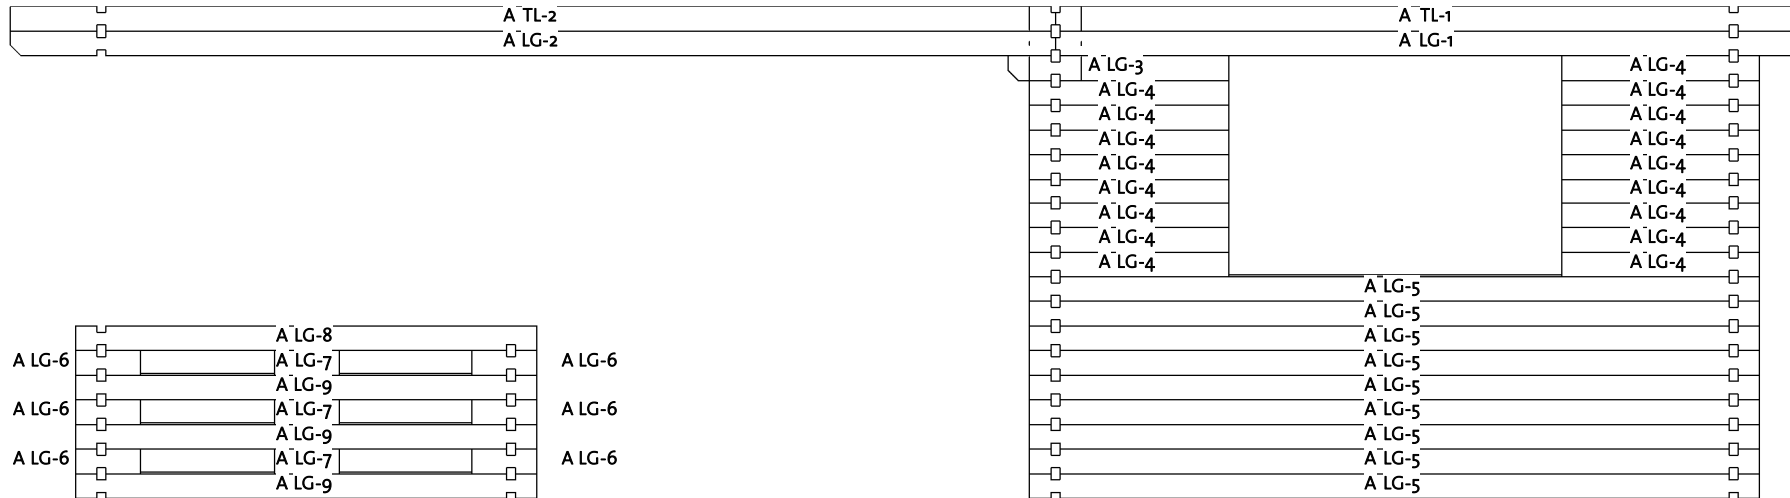


Kitchener 3 40 (226 3/8" x 299 1/4")

Wall B

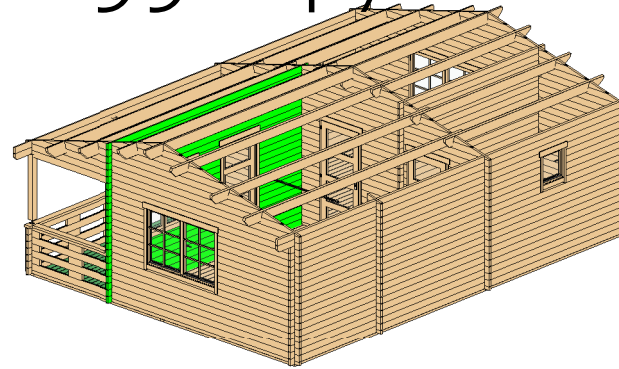

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	9	22 5/8"
BLG-2	40X114	5	183 1/2"
BLG-3	40X114	9	20 1/2"
BLG-4	40X114	17	46 1/4"
BLG-5	40X114	1	183 1/2"
BLG-6	40X114	8	103 3/4"
BTL-1	40X114	1	183 1/2"

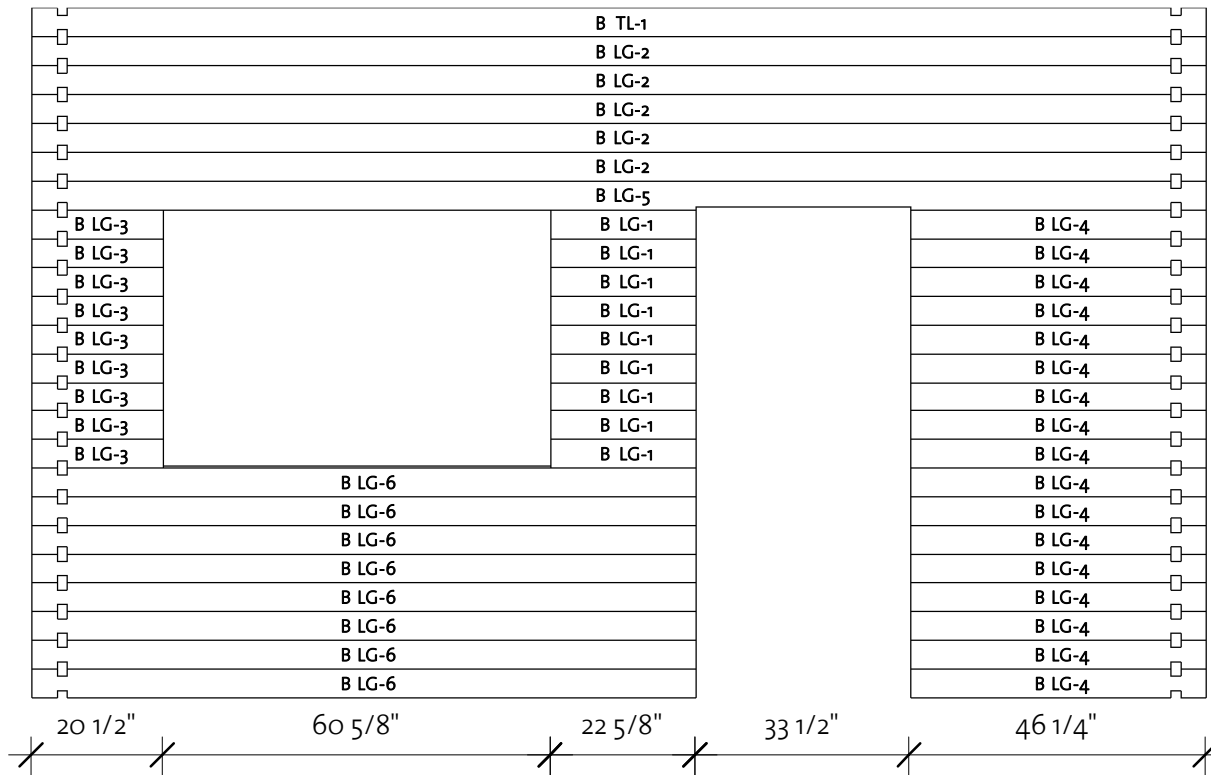



Log Profile Wall B	
Profile	Profile


40X114	
40X114	

Kitchener 3 40 (226 3/8" x 299 1/4")

Wall D


Log Profile Wall D	
Profile	Profile

4OX114	
4OX114	

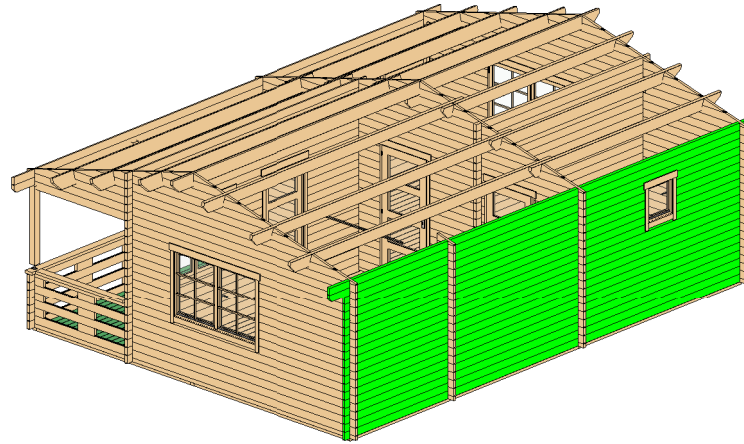


Wall D			
Mark	Profile	Count	Cut Length

DLG-1	4OX114	1	190 1/2"
DLG-2	4OX114	7	79 1/2"
DLG-3	4OX114	5	229 7/8"
DLG-4	4OX114	5	55 7/8"
DLG-5	4OX114	6	128 3/8"
DLG-6	4OX114	7	227 1/2"
DLG-7	4OX114	6	178 3/4"
DLG-8	4OX114	1	136 1/4"
DTL-1	4OX114	1	235 3/8"
DTL-2	4OX114	1	91 3/8"

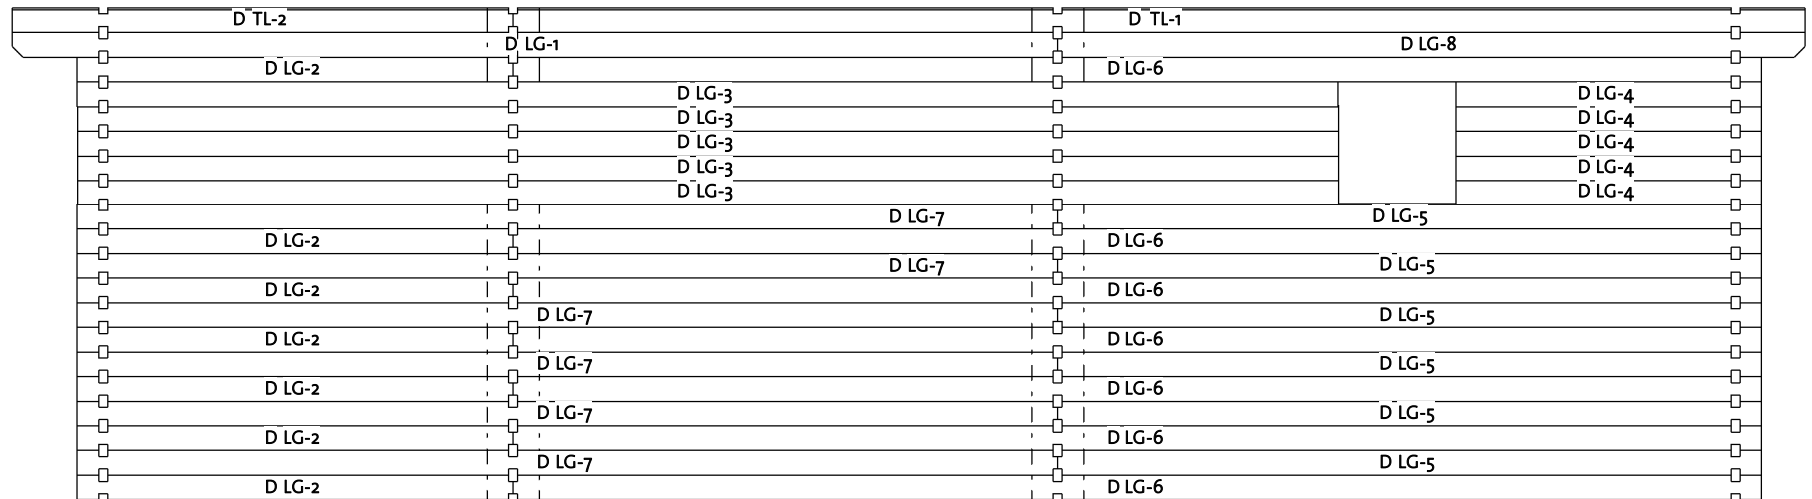







Kitchener 3 40 (226 3/8" x 299 1/4")

Roof 1

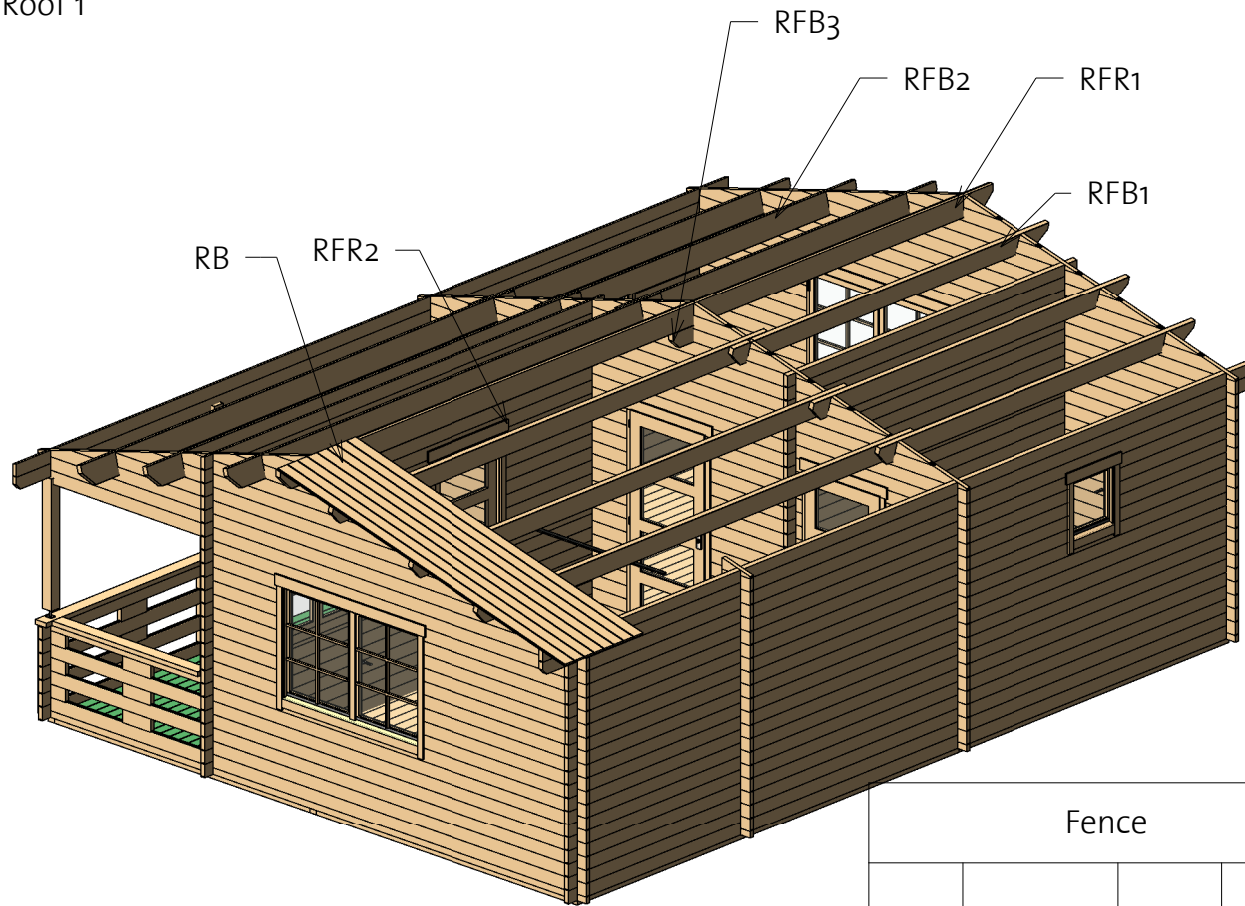


Columns			
Mark	Profile	Count	Length
CM1	Post 80x70	1	44 1/2"
CM2	Post 80x70	1	46 5/8"

Fence			
Mark	Type	Count	Cut Length
FN1	Fence 40x120	1	84 1/4"
FN2	Fence 40x120	1	62"



Roof				
Mark	Type	Profile	Count	Cut Length
RB	17x114		148	126 7/8"
RFB1	Beam 45x195		6	199 1/4"
RFB2	Beam 45x195		6	144 7/8"
RFB3	Beam 45x143		1	20 1/2"
RFR1	Ridge 45x195		1	136 1/4"
RFR2	Ridge 45x195		1	190 1/2"

Kitchener 3 40 (226 3/8" x 299 1/4")


Roof 2

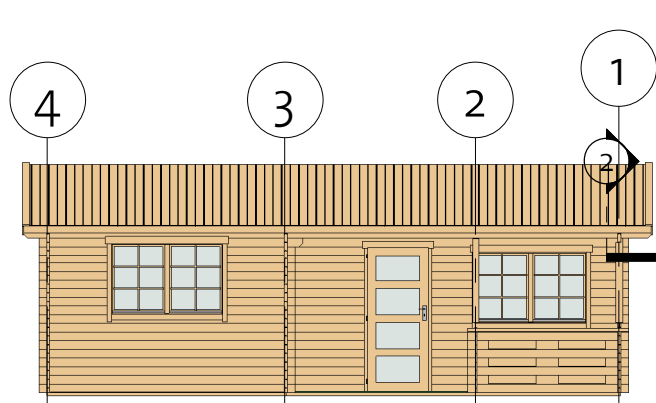

② Facia

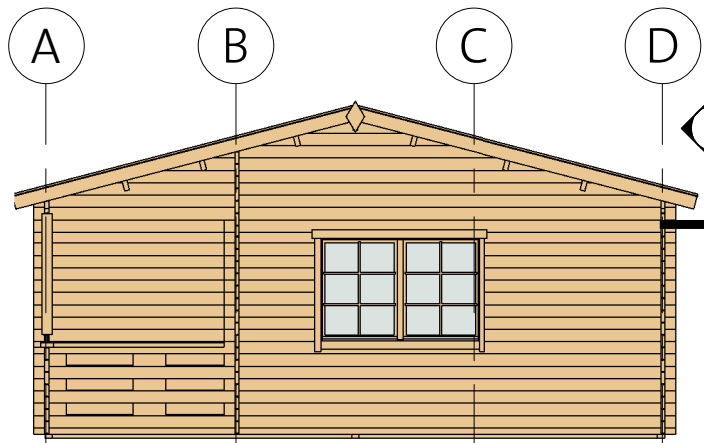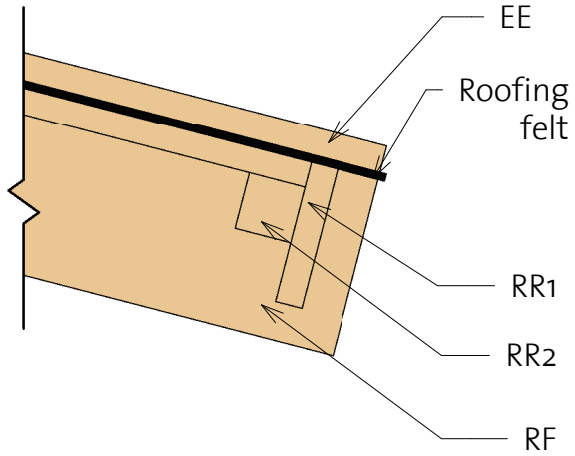

③ Roof Reinforcement

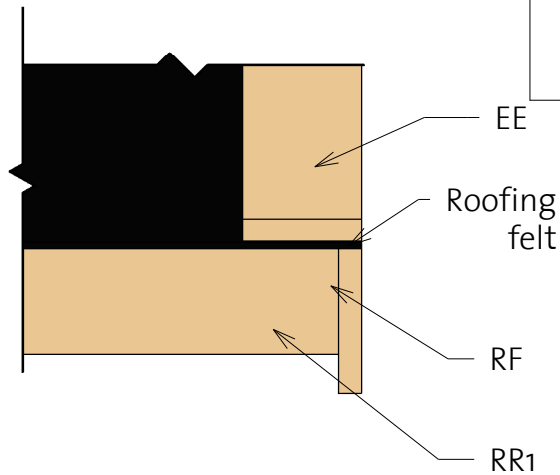


Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x95		4	128 7/8"
RF	Roof Fascia 18x120		4	128 7/8"
RR1	Roof reinforcement 18x95		4	163 3/8"
RR2	Roof reinforcement 38x38		4	163 3/8"

Kitchener 3 40 (226 3/8" x 299 1/4")

Extras

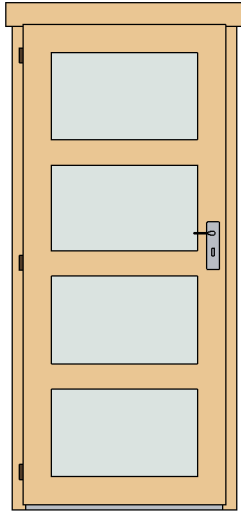



Door Schedule				
Model	Type	Width	Height	Count
CD2L	Classic door 2, four glass left	33 1/8"	77"	3

Type	Count	Length
Windboard 18x40	7	86 5/8"

Type	Count
Romb	2


Fasteners/Extras		
Name	Type	Count
Hitblock	300-400 mm	
Bolts	M8x70	21
Dowel	16,0 x 150	46
Screws	5,0 x 70	50
Nails	1,4 x 40	80
Screws	6,0 x 140	170
Screws	4,0 x 40	1640

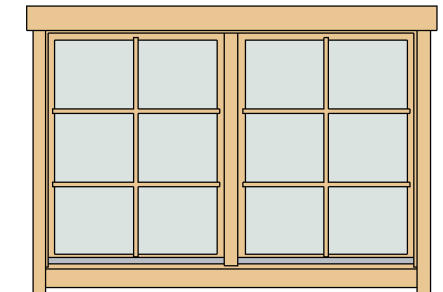

Window Schedule				
Model	Type	Width	Height	Count
CDW1	Classic double window 1	60 1/4"	39"	4
CW12R	Classic window 12, full glass righth	21 1/4"	21 1/4"	1
WCB6	Window Crossbar 6			8







Kitchener 3 40 (226 3/8"x299 1/4")

List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		32	108 7/8"
IFB2	IFB 70x40		3	174 5/8"
IFB3	IFB 70x40		3	124 1/4"
IFB4	IFB 70x40		2	18 3/4"

Floor Schedule				
Mark	Type	Profile	Count	Length
FB1	FB 17x114		35	172 1/4"
FB2	FB 17x114		50	121 3/4"
TB	TB 21x95		17	172 1/4"

BB 1	BB 18x40		5	126"
BB 2	BB 18x40		5	173 1/4"





Roof				
Mark	Type	Profile	Count	Cut Length
RB	17x114		148	126 7/8"
RFB1	Beam 45x195		6	199 1/4"
RFB2	Beam 45x195		6	144 7/8"
RFB3	Beam 45x143		1	20 1/2"
RFR1	Ridge 45x195		1	136 1/4"
RFR2	Ridge 45x195		1	190 1/2"

Columns			
Mark	Profile	Count	Length
CM1	Post 80x70	1	44 1/2"
CM2	Post 80x70	1	46 5/8"

Fence			
Mark	Type	Count	Cut Length
FN1	Fence 40x120	1	84 1/4"
FN2	Fence 40x120	1	62"

Kitchener 3 40 (226 3/8"x299 1/4")

List of all items 2

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	128 7/8"
RF	Roof Fascia 18x120		4	128 7/8"
RR1	Roof reinforcement 18x95		4	163 3/8"
RR2	Roof reinforcement 38x38		4	163 3/8"

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	1	234 1/4"
1LG-1 *	40x114	1	33"
1LG-2 *	40x114	1	67 1/2"
1LG-3 *	40x114	1	102 1/8"
1LG-4 *	40x114	1	136 3/4"
1LG-5 *	40x114	1	168 3/8"
1LG-6 *	40x114	1	205 7/8"
1LG-7 *	40x114	1	234 1/4"
1LG-8	40x114	1	234 1/4"
1LG-9	40x114	1	234 1/4"
1LG-10	40x114	4	165"
1LG-11	40x114	9	33 7/8"
1LG-12	40x114	9	70 1/2"
1LG-13	40x114	1	234 1/4"
1LG-14	40x114	3	234 1/4"
1LG-15	40x114	3	11 3/4"
1LG-16	40x114	3	11 3/4"

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	2	11 3/4"
2LG-1	40x57	1	11 3/4"
2LG-2	40x114	25	11 3/4"
2LG-3	40x114	1	11 3/4"

* Gable - delivered premounted

Kitchener 3 40 (226 3/8"x299 1/4")

List of all items 3

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	91 1/8"
3BL-2	40X57	1	41"
3BL-3	40X57	1	35 1/4"
3LG-1 *	40X114	1	33"
3LG-2 *	40X114	1	67 1/2"
3LG-3 *	40X114	1	102 1/8"
3LG-4 *	40X114	1	136 3/4"
3LG-5 *	40X114	1	168 3/8"
3LG-6 *	40X114	1	205 7/8"
3LG-7 *	40X114	1	234 1/4"
3LG-8	40X114	2	234 1/4"
3LG-9	40X114	17	91 1/8"
3LG-10	40X114	17	41"
3LG-11	40X114	17	35 1/4"

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	1	136 1/4"
ALG-2	40X114	1	190 1/2"
ALG-3	40X114	1	40 1/8"
ALG-4	40X114	17	36 1/4"
ALG-5	40X114	9	133 1/8"
ALG-6	40X114	6	11 3/4"
ALG-7	40X114	3	11 3/4"
ALG-8	40X114	1	84 1/4"
ALG-9	40X114	3	84 1/4"
ATL-1	40X114	1	136 1/4"
ATL-2	40X114	1	190 1/2"

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	234 1/4"
4LG-1 *	40X114	1	33"
4LG-2 *	40X114	1	67 1/2"
4LG-3 *	40X114	1	102 1/8"
4LG-4 *	40X114	1	136 3/4"
4LG-5 *	40X114	1	171 3/8"
4LG-6 *	40X114	1	205 7/8"
4LG-7	40X114	1	234 1/4"
4LG-8	40X114	2	234 1/4"
4LG-9	40X114	9	121 1/8"
4LG-10	40X114	9	52 1/2"
4LG-11	40X114	8	234 1/4"

* Gable - delivered premounted

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	9	22 5/8"
BLG-2	40X114	5	183 1/2"
BLG-3	40X114	9	20 1/2"
BLG-4	40X114	17	46 1/4"
BLG-5	40X114	1	183 1/2"
BLG-6	40X114	8	103 3/4"
BTL-1	40X114	1	183 1/2"

Kitchener 3 40 (226 3/8"x299 1/4")

List of all items 4





Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	23	133 1/8"
CTL-1	40X114	1	133 1/8"

Wall D			
Mark	Profile	Count	Cut Length

DLG-1	40X114	1	190 1/2"
DLG-2	40X114	7	79 1/2"
DLG-3	40X114	5	229 7/8"
DLG-4	40X114	5	55 7/8"
DLG-5	40X114	6	128 3/8"
DLG-6	40X114	7	227 1/2"
DLG-7	40X114	6	178 3/4"
DLG-8	40X114	1	136 1/4"
DTL-1	40X114	1	235 3/8"
DTL-2	40X114	1	91 3/8"

Log profiles	
Profile	Images4

40X57	
40X114	
40X114	
40X114	
40X114	