




Scarborough 160 40 (305x487)

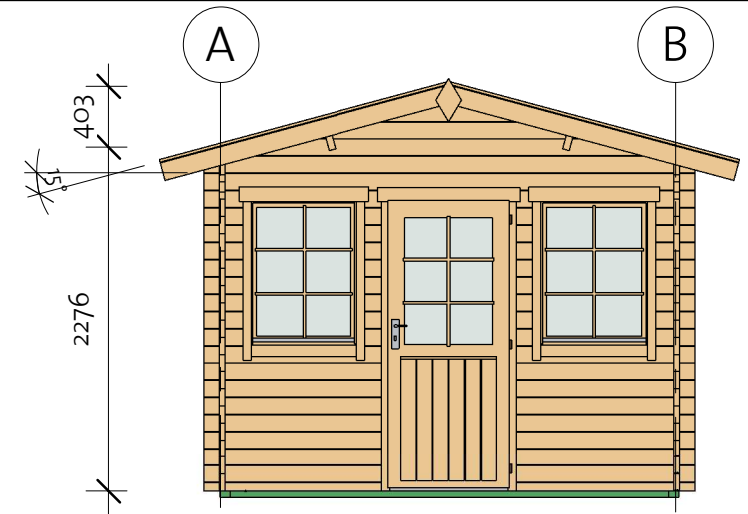

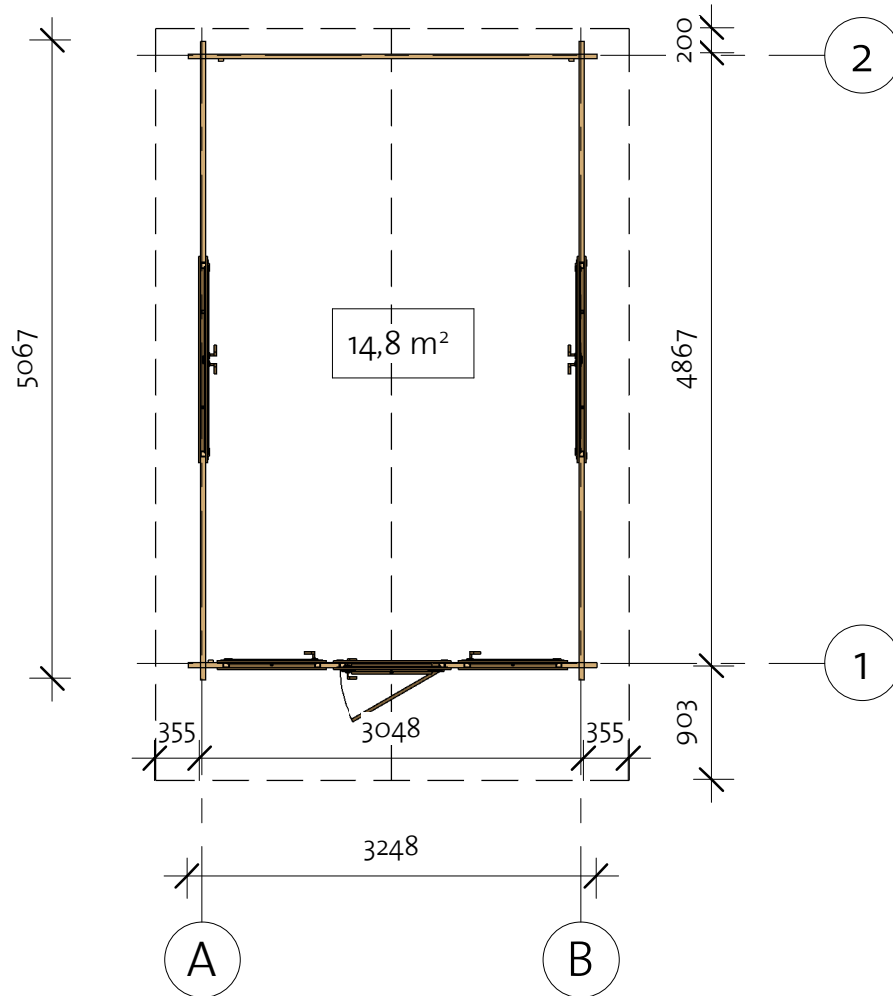


EZ Log Structures
Do-It-Yourself Building Kits

Scarborough 160 40 (305x487)

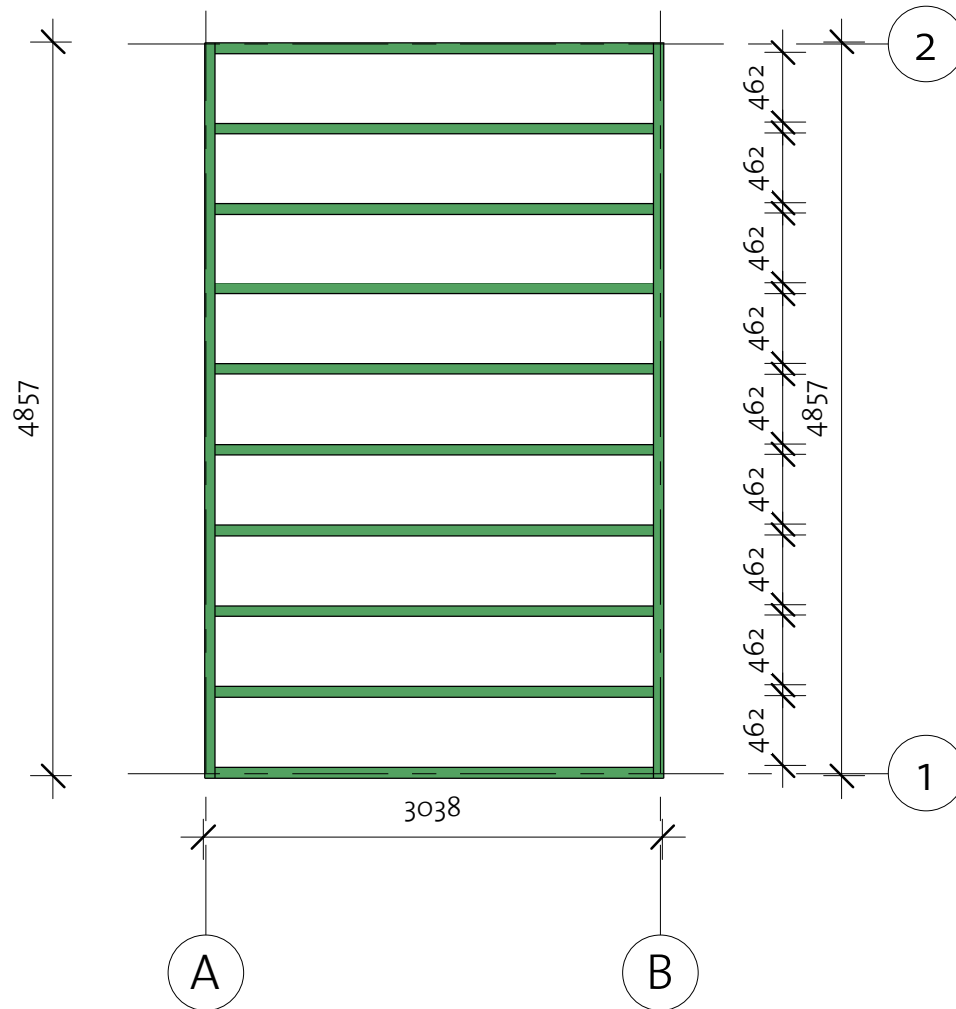Foundation





Impregnated foundation beams				
Mark	Type	Profile	Count	Length



	IFB 70x40		4	2898
IFB1	IFB 70x40		6	2898
IFB2	IFB 70x40		2	4857

Scarborough 160 40 (305x487)

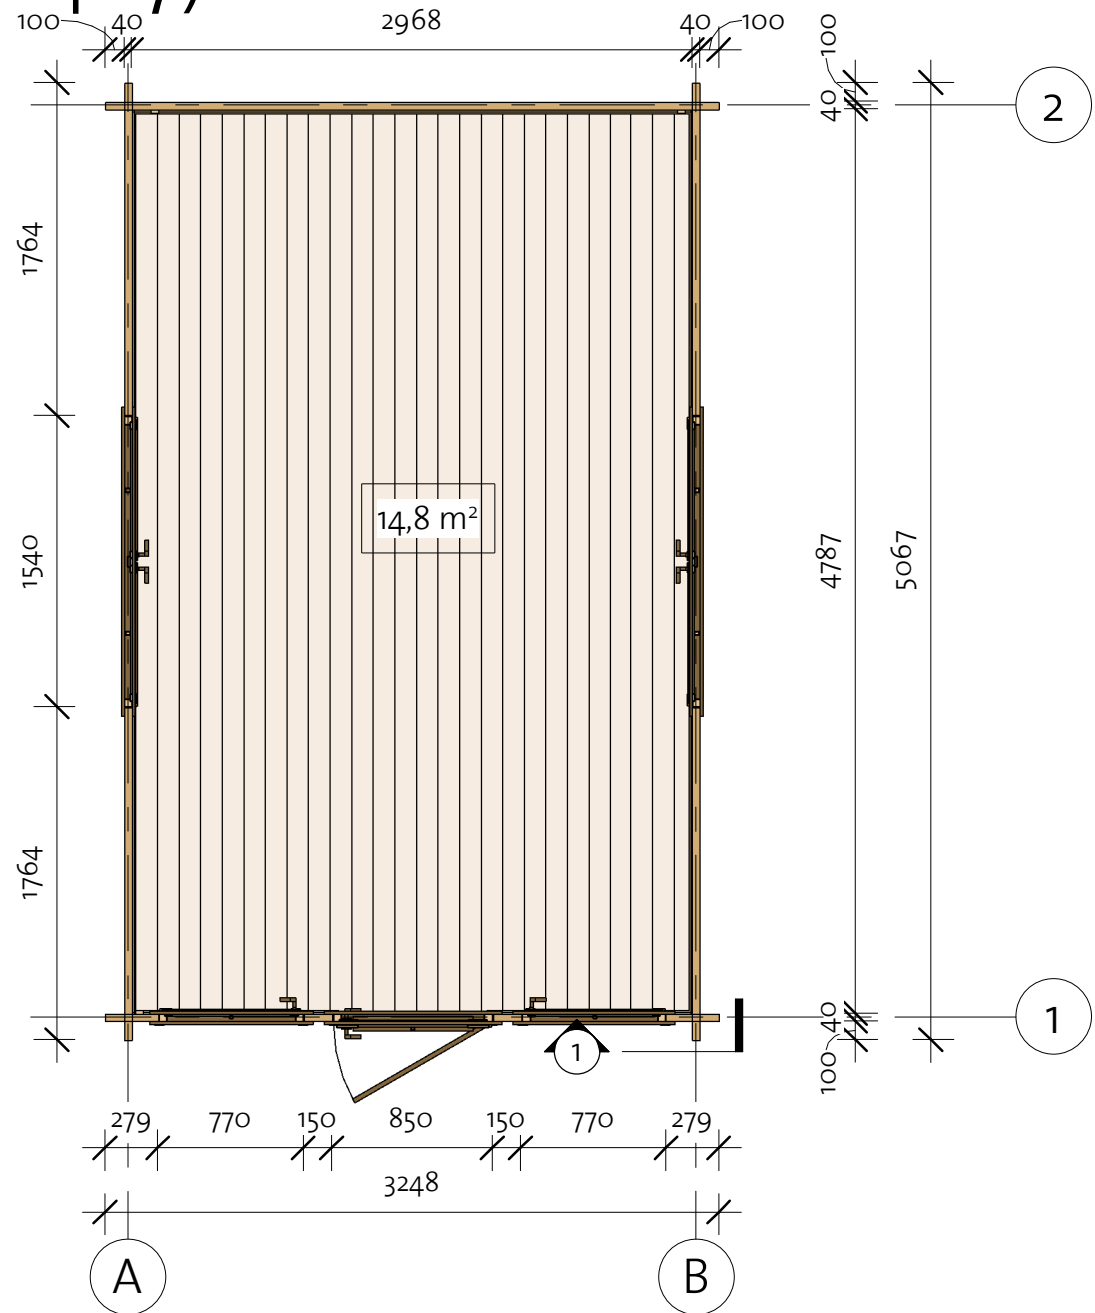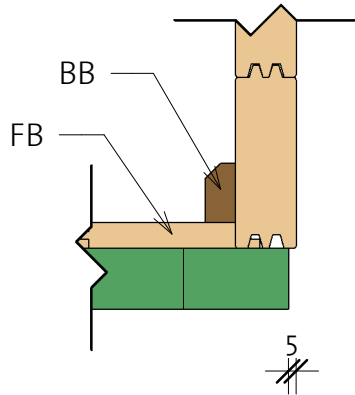Floor Plan (1) Baseboard





Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		27	4784
BB1	BB 20x40		2	3100
BB2	BB 20x40		2	4900

92309191_231002

Scarborough 160 40 (305x487)

Wall 1

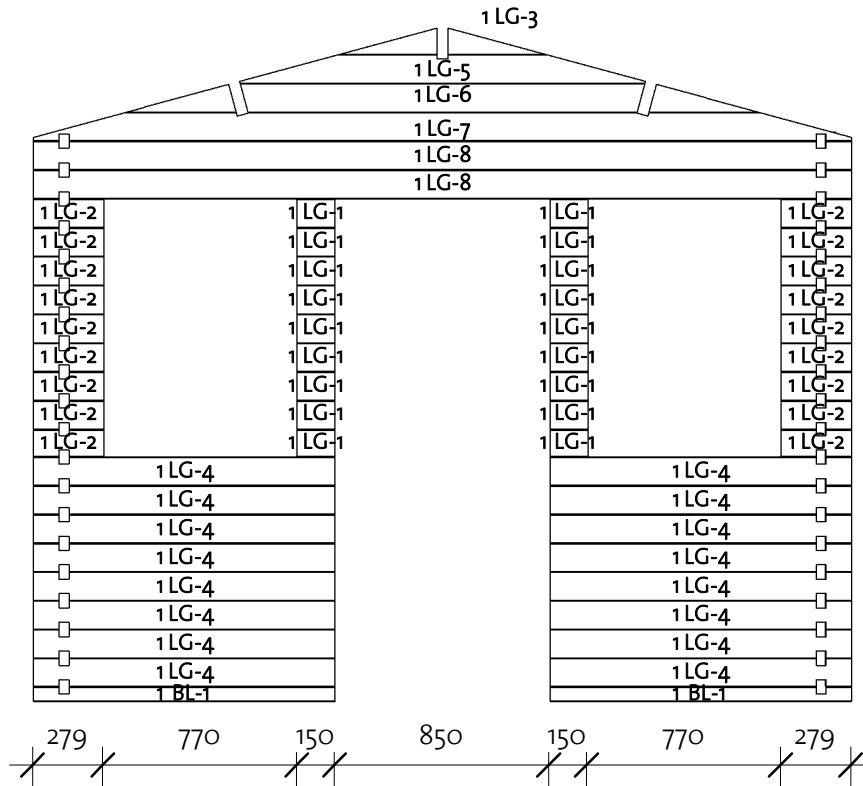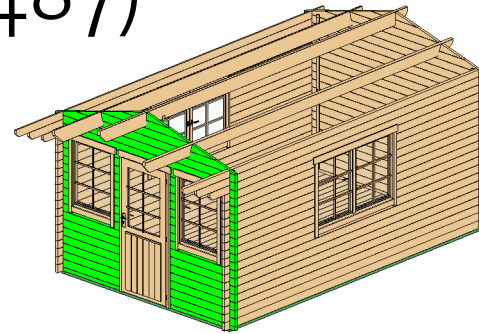

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1199
1LG-1	40X114	18	150
1LG-2	40X114	18	279
1LG-3 *	40X114	1	823
1LG-4	40X114	16	1199
1LG-5 *	40X114	1	1605
1LG-6 *	40X114	1	2515
1LG-7 *	40X114	1	3248
1LG-8	40X114	2	3248


* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40X57	
40X114	


Scarborough 160 40 (305x487)

Wall 2

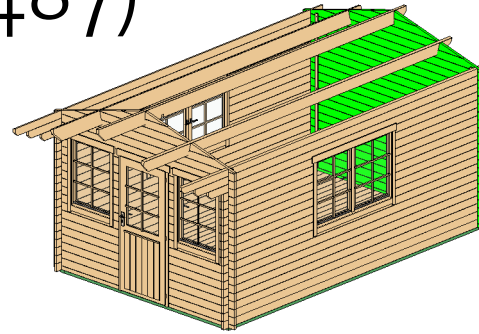



Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	3248
2LG-1*	40X114	1	823
2LG-2*	40X114	1	1605
2LG-3*	40X114	1	2515
2LG-4*	40X114	1	3248
2LG-5	40X114	19	3248

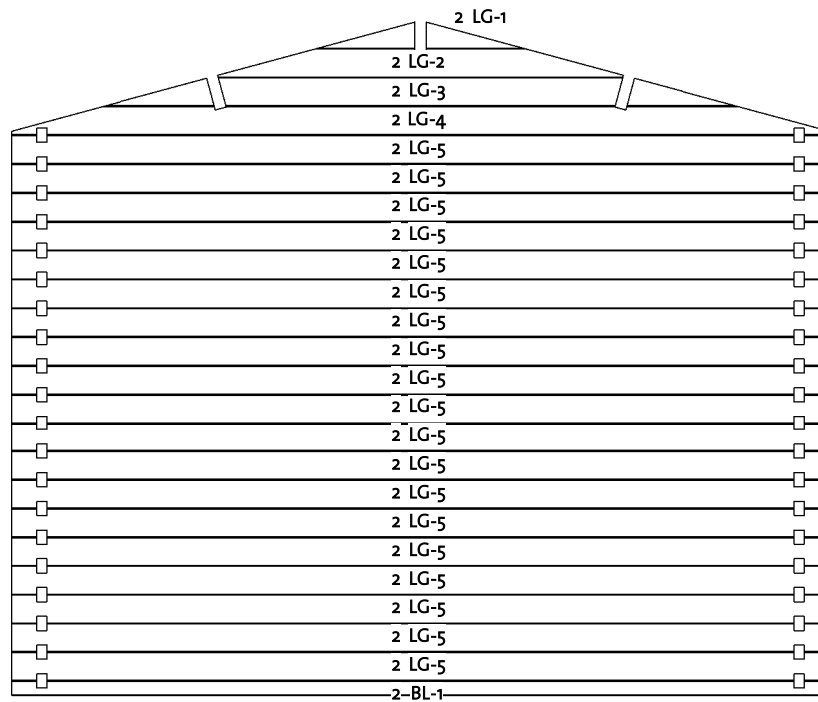


* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile


40X57	
40X114	

Scarborough 160 40 (305x487)

Wall A

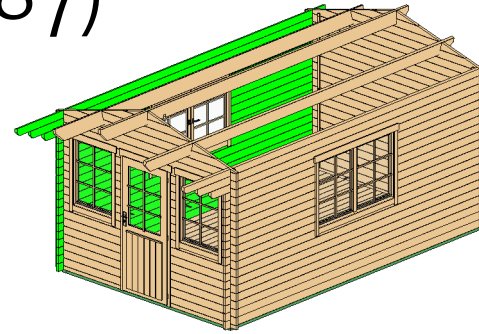

Wall A			
Mark	Profile	Count	Cut Length
ALG-1	40X114	18	1764
ALG-2	40X114	1	5610
ALG-3	40X114	8	5067
ALG-4	40X114	1	5350
ATL-1	40X114	1	5970

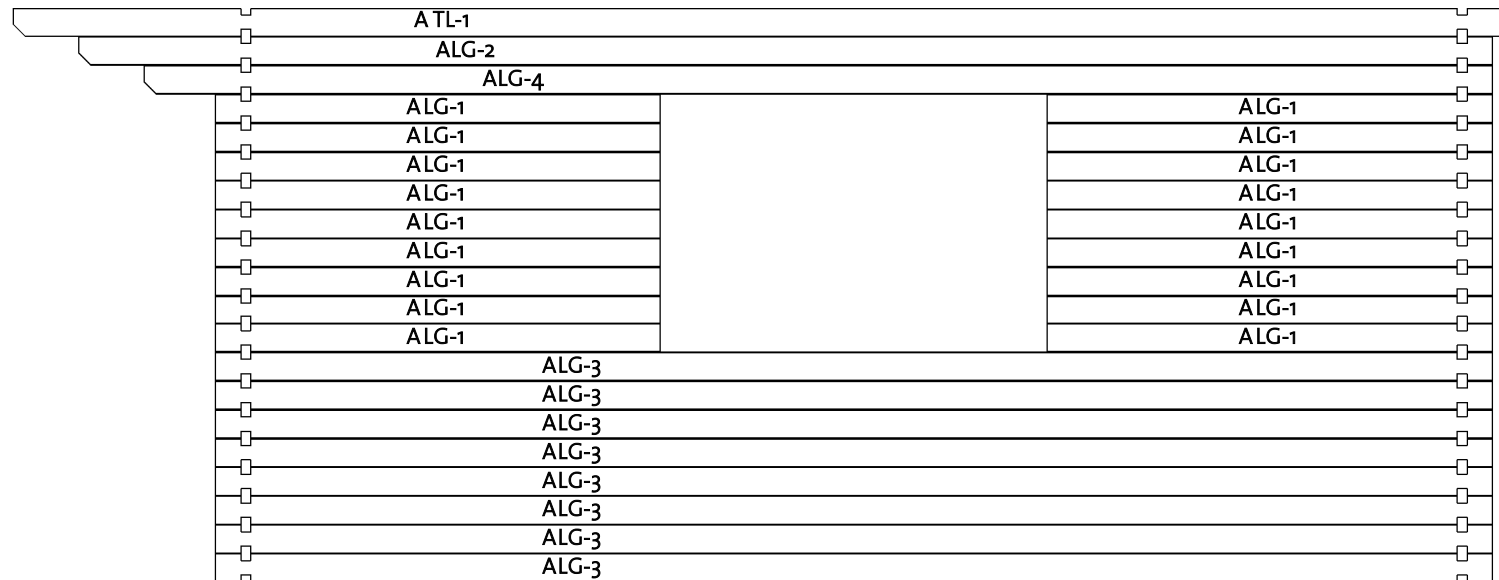


Log Profile Wall A	
Profile	Profile


40X114	
40X114	

Scarborough 160 40 (305x487)

Wall B

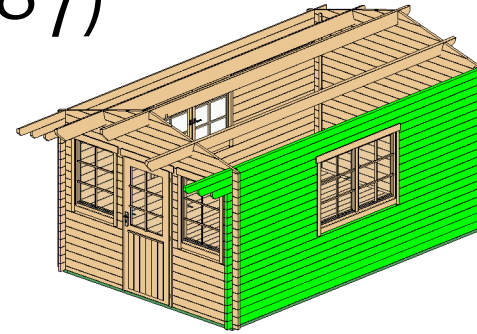

Wall B			
Mark	Profile	Count	Cut Length
BLG-1	40X114	18	1764
BLG-2	40X114	1	5610
BLG-3	40X114	8	5067
BLG-4	40X114	1	5350
BTL-1	40X114	1	5970

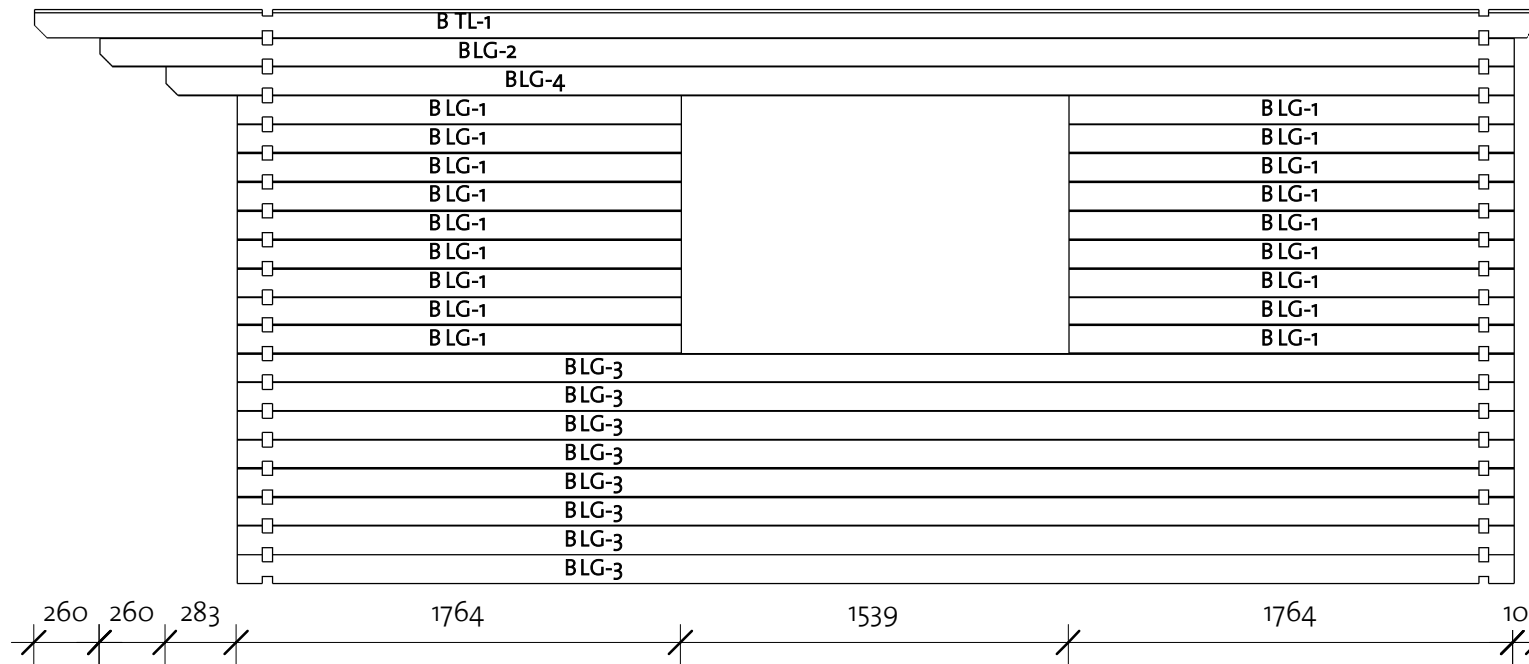





Log Profile Wall B	
Profile	Profile

40X114	
40X114	

Scarborough 160 40 (305x487)

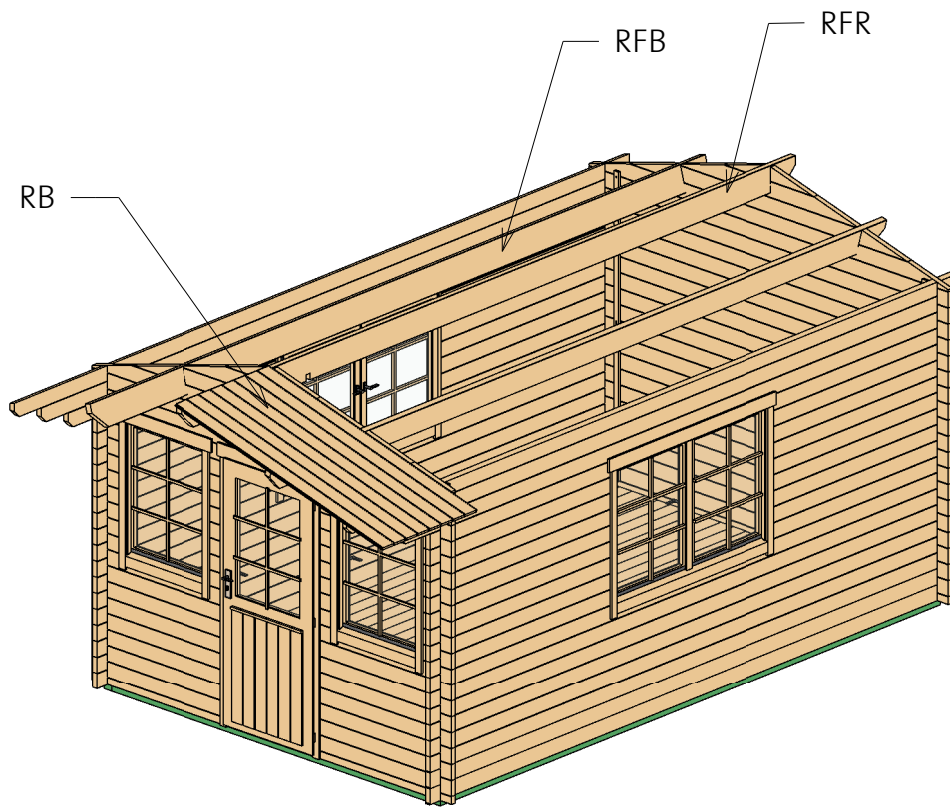Roof 1





Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	5970
RFB	Beam 45x195		2	5970
RB	17x114		108	1941



Scarborough 160 40 (305x487)

Roof 2

② Facia

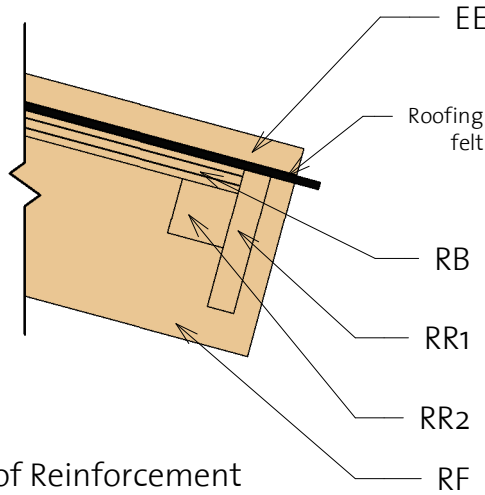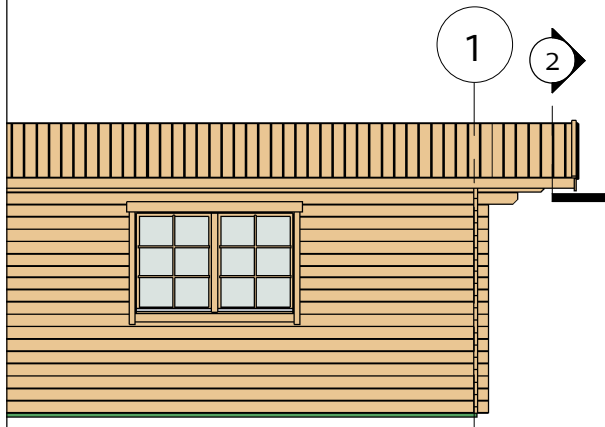

③ Roof Reinforcement

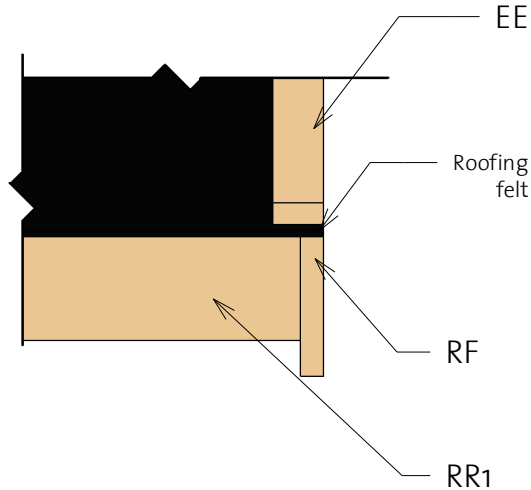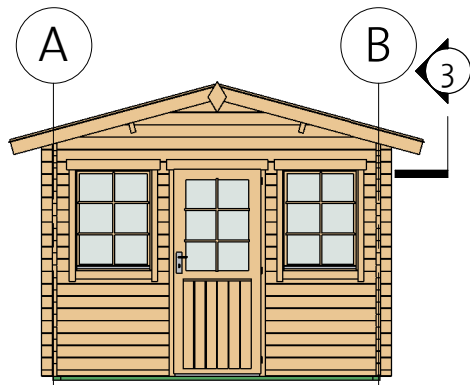


Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1980
RF	Roof Fascia 18x120		4	1980
RR1	Roof reinforce ment 18x95		2	5970
RR2	Roof reinforce ment 38x38		2	5970

Scarborough 160 40 (305x487)

Extras

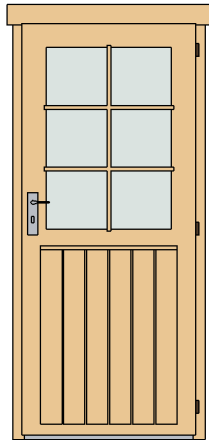

Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1

Type	Count	Length
------	-------	--------







Windboard 18x40	4	2200
-----------------	---	------

Type	Count
------	-------

Romb	2
------	---





Fasteners/Extras

Hitblock	300-400 mm		
Bolts	M8x70		12
Screws	5,0 x 70		15
Nails	1,4 x 40		30
Screws	6,0 x 140		45
Screws	4,0 x 40		650

Window Schedule

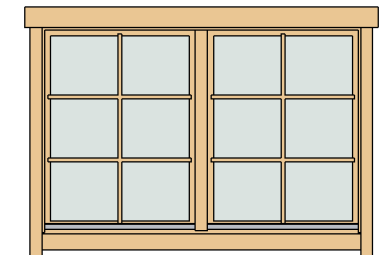


Mark	Type	Width	Height	Count
CDW1	Classic double window 1	1530	990	2
CW1L	Classic window 1 left	765	990	1
CW1R	Classic window 1 right	765	990	1
WCB6	Windows Crossbar 6	--	--	6






Scarborough 160 40 (305x487)

List of all items 1


Impregnated foundation beams				
Mark	Type	Profile	Count	Length


	IFB 70x40		4	2898
IFB1	IFB 70x40		6	2898
IFB2	IFB 70x40		2	4857

Roof				
Mark	Type	Profile	Count	Length





RFR	Ridge 45x195		1	5970
RFB	Beam 45x195		2	5970
RB	17x114		108	1941

Floor Schedule				
Mark	Type	Profile	Count	Length

FB	FB 17x114		27	4784
----	-----------	---	----	------

BB1	BB 20x40		2	3100
BB2	BB 20x40		2	4900

Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x40		4	1980
RF	Roof Fascia 18x120		4	1980
RR1	Roof reinforce ment 18x95		2	5970
RR2	Roof reinforce ment 38x38		2	5970

Scarborough 160 40 (305x487)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	1199
1LG-1	40x114	18	150
1LG-2	40x114	18	279
1LG-3*	40x114	1	823
1LG-4	40x114	16	1199
1LG-5*	40x114	1	1605
1LG-6*	40x114	1	2515
1LG-7*	40x114	1	3248
1LG-8	40x114	2	3248

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	3248
2LG-1*	40x114	1	823
2LG-2*	40x114	1	1605
2LG-3*	40x114	1	2515
2LG-4*	40x114	1	3248
2LG-5	40x114	19	3248

* Gable - delivered premounted



Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	1764
ALG-2	40x114	1	5610
ALG-3	40x114	8	5067
ALG-4	40x114	1	5350
ATL-1	40x114	1	5970


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	1764
BLG-2	40x114	1	5610
BLG-3	40x114	8	5067
BLG-4	40x114	1	5350
BTL-1	40x114	1	5970

Log profiles	
Profile	Profile

40x57	
40x114	

Log profiles	
Profile	Profile

40x114	
--------	--